



### SINGLE AND DOUBLE STAGE



**Connection thread**  
3/8" -NPT female



Accurate

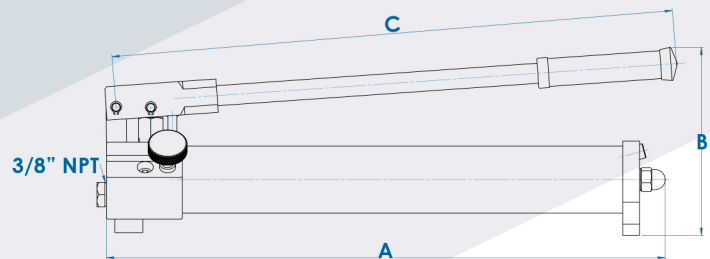

## MANUAL PUMP

### SINGLE AND DOUBLE STAGE

#### BS

- Single or double stage pumps available. Double stage models are used for quickly approaching the plunger to the load.
- Connection thread 3/8"-NPT, female.
- All models include an internal safety valve to prevent overpressure.
- The cap gasket in the filling port functions as a safety valve to prevent overpressure in the tank.
- A relief valve over the check valve prevents the loads from going down.
- A large valve controller offers a greater degree of control to drop loads slowly and accurately.
- Completely made of steel, nitrated plunger and cleaning system to provide a reliable performance over a long period of time.

REF.	Effective Oil cm <sup>3</sup>	Material	Stages	Flow per Displacement		Trigger Pressure BAR	Size (mm)					Weight Kg.
				1ª etapa cm <sup>3</sup>	2ª etapa cm <sup>3</sup>		A	B	C	D	E	
<b>BS106</b>	600	Acero	1	--	2,6	700	500	170	510	105	34	6,5
<b>BS112</b>	1200	Acero	1	--	2,6	700	850	170	510	105	34	8,2
<b>BS206</b>	600	Acero	2	8,1	2	700	515	170	510	105	34	6,5
<b>BS212</b>	1200	Acero	2	8,9	2,1	700	865	170	510	105	34	8,2