


HOLLOW DOUBLE- ACTING

DH SERIES

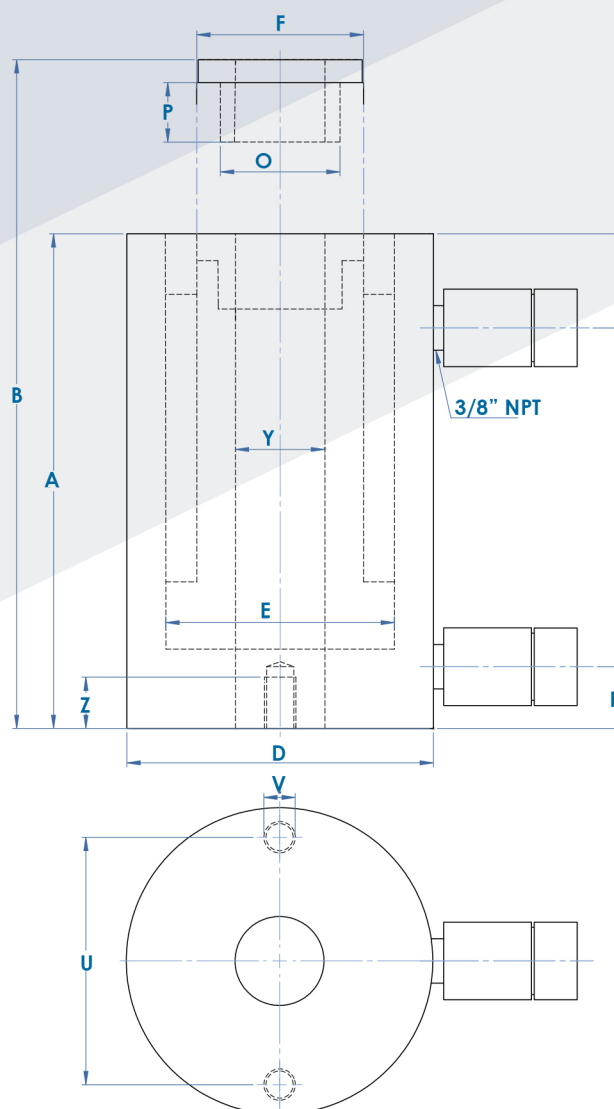

HOLLOW CYLINDER DOUBLE-ACTING

DH


- Hollow piston cylinder.
- Built-in safety valve to prevent overpressures.
- Nitrated piston, central tube and lead-in top to prevent rust and increase wear resistance.



Threaded hollow saddles and **grooved solid saddles** available. See page 15.



DOUBLE-ACTING HOLLOW CYLINDERS



DOUBLE-ACTING HOLLOW PISTON



Stroke
150 mm



Thrust and traction
30 to 93 Tn

HOLLOW DOUBLE- ACTING

DH SERIES

25



Aluminium Hollow Double-Acting Cylinders – **DHA**.
» Page 42.

Accessories: **Valves, distributors, fittings**, etc.
» Pages 56 –63.

Double-Acting Cylinders – D » Page 22.

- The top head prevents the piston extraction and withstands all the power of the cylinder.
- Interchangeable saddles – flat, threaded or solid.

- High-flow female quick plug coupling with dust cover as standard in all models.
- Special stroke lengths on demand.

Rated Force	REF.	Stroke	Maximum Force	Usable Cross-Section	Size (mm)														Oil Capacity	Weight
					A	B	D	E	F	H	I	O	P	U	V	Y	Z			
tn		mm.	kN	cm²	A	B	D	E	F	H	I	O	P	U	V	Y	Z	cm³	Kg.	
28,9	DH03015	150	283,1	41,24	296	446	114	85	65	23	47	M46X1,5	22	92,1	3/8 - 16 UNC	33,6	20	619	17,4	
59,1	DH06015	150	579,5	84,42	302	452	155	125	94	23	48	M72X1,5	25	130,2	1/2 -18 UNC	54	20	1266	32	
93,2	DH10015	150	914	133,17	313	463	200	165,1	130	38	50	M104x1,5	30	----	----	79	----	1998	52	