


HOLLOW SINGLE- ACTING

RH SERIES

26

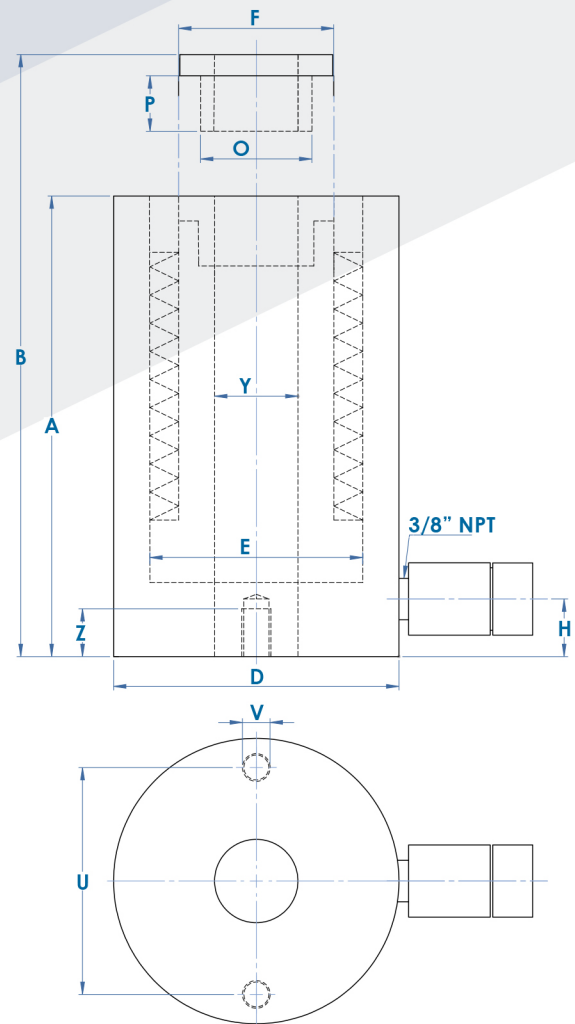

HOLLOW CYLINDER SINGLE-ACTING

RH

- Hollow piston cylinder designed for traction and thrust jobs. Wire and bolt tensioning, removal of sleeves and bearings.
- Nitrated piston, central tube and lead-in top to prevent rust and increase wear resistance.

- The top head prevents the piston extraction and withstands all the power of the cylinder.
- Interchangeable saddles — flat, threaded or solid.
- High-flow female quick plug coupling with dust cover as standard in all models.
- Longer strokes on demand.



SINGLE-ACTING HOLLOW CYLINDER



SINGLE-ACTING SPRING RETURN



Stroke
Up to 150 mm



Thrust
12 to 93 Tn

HOLLOW SINGLE- ACTING

RH SERIES



Threaded hollow saddles and **grooved solid saddles** available. See page 15.

Aluminium Hollow Single-Acting Cylinders – **RHA**.
» Page 44.

Accessories: **Valves, distributors, fittings**, etc.
» Pages 56 -63.

Rated Force	REF.	Stroke	Maximum Force	Usable Cross-Section	Size (mm)												Oil Capacity	Weight
					A	B	D	E	F	H	O	P	U	V	Y	Z		
tn		mm.	kN	cm ²													cm ³	Kg.
12,6	RH01204	41	123,6	18,03	145	186	70	55	38,5	20	M29x1,5	20	50,8	5/16 - 18 UNC	19,6	16	74	3,5
	RH01208	76			191	267											137	4,5
20,2	RH02005	48	198,1	28,86	172	220	95	70	50,5	20	M37x1,5	20	82,6	3/8 - 16 UNC	27,5	20	139	7,1
	RH02015	150			321	471											433	13
28,9	RH03006	63	283,1	41,24	200	263	110	85	62	23	M46X1,5	22	92,1	3/8 - 16 UNC	33,6	20	260	10,5
	RH03015	150			340	490											619	17,2
59,1	RH06008	76	579,6	84,45	245	321	155	125	94	34 23	M72x1,5	25	130,2	1/2 - 18 UNC	54	20	642	26,2
	RH06015	150			358	508											1267	36,4
93,2	RH10008	76	914	133,17	272	348	200	165,1	127	38	M104x1,5	30	----	----	79	----	1012	46,2
	RH10015	150			399	549											1998	66