

FIGURE 3


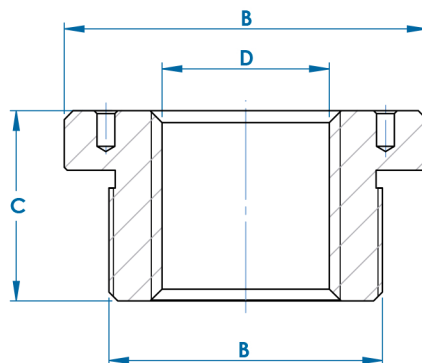


FIGURE 4

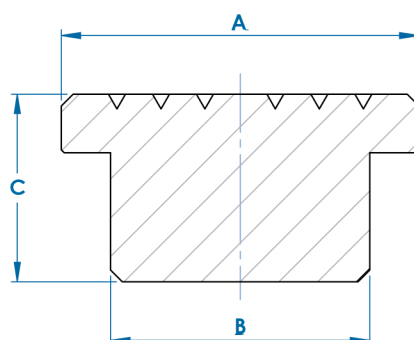

THREADED HOLLOW AND GROOVED SOLID SADDLES ACCESSORIES

- They are used in hollow single and double acting cylinders both in steel and aluminium.

REF.	SIZE				FIG.	Weight Kg	Cylinder model with which it is used
	A	B	C	D			
SRRH012	38	M29x1,5	28	3/4 - 16UNF	3	0,1	RH012
SMRH012	38	27,2	28		4	0,15	RH012
SRRH020	50	M37x1,5	30	1 - 8 UNF	3	0,22	RH020
SMRH020	50	35,2	30		4	0,3	RH020
SRRH030	61	M46 x 1,5	32	1 - 1/4 UNF	3	0,33	RH030, DH030, RHA030, DHA030
SMRH030	61	44,2	32		4	0,47	RH030, DH030, RHA030, DHA 030
SRRH060	93,5	M72 x 1,5	37	1 5/8 -5 1/2 UNF	3	1,12	RH060, DH060, RHA060, DHA060
SMRH060	93,5	70,2	37		4	1,4	RH060, DH060, RHA060, DHA060
SMRH100	127	102,2	42		4	3	RH100, DH100, RHA100, DHA100